




Magellan RoadMate 1440 Battery Replacement

This guide will illustrate how to remove and replace the battery in their device.

Written By: Jeremy Johnson

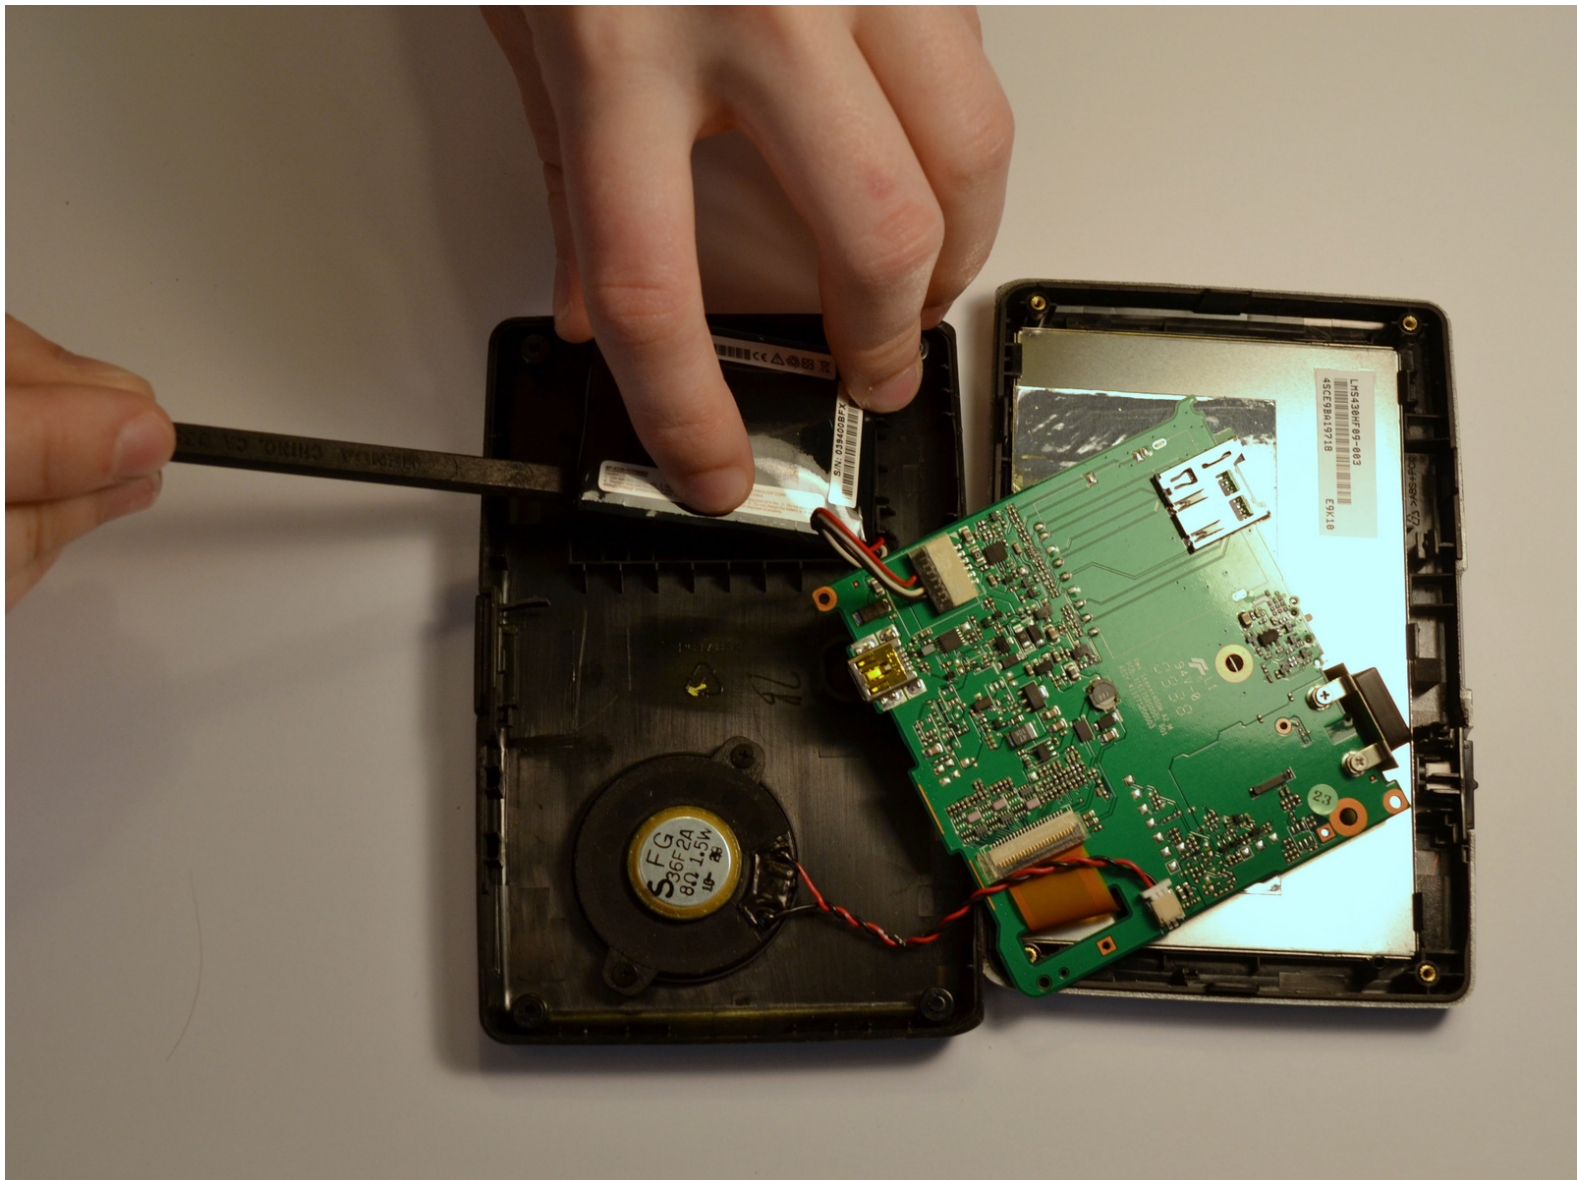

INTRODUCTION

This guide will illustrate how to remove and replace the battery in their device.

TOOLS:

- [Phillips #0 Screwdriver](#) (1)
 - [Heavy-Duty Spudger](#) (1)
-

Step 1 — Magellan RoadMate 1440 Back Cover Disassembly



- Place the GPS with the screen facing down.

Step 2



- Locate the four screws in the back cover of the device. Use a Phillips #0 screwdriver to remove all four 4.2mm Phillips #0 screws.

Step 3




- Locate the screws at the bottom of the device. Use a Phillips #0 screwdriver to remove the two 4.2mm Phillips #0 screws.

Step 4




- Insert the black spudger into the crease in the side of the GPS.
- Move the end of the spudger down to break the seal between the two plastic shells.
- Continue doing this along each side of the GPS to ensure a smooth removal.

Step 5

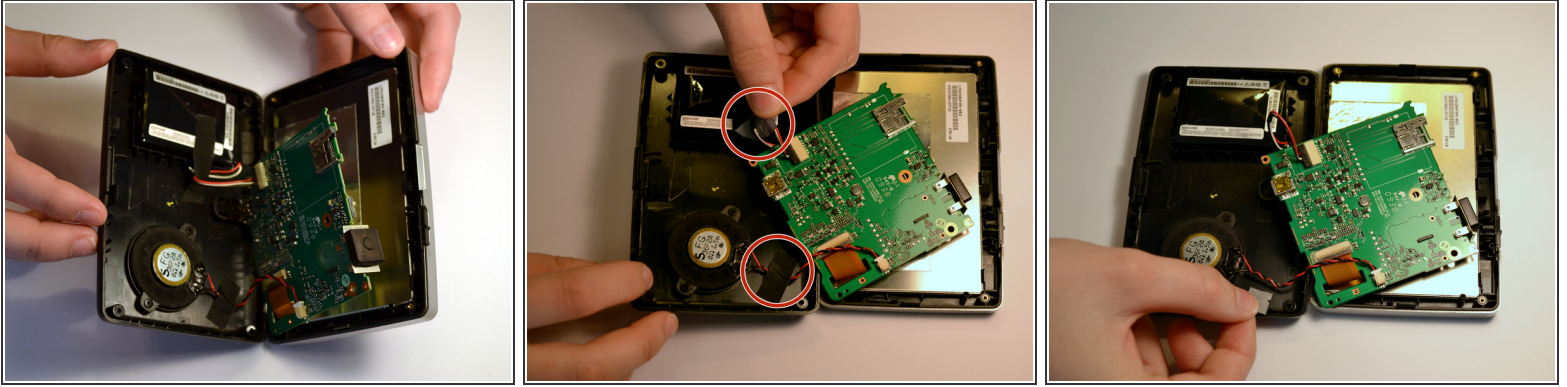



- Fully separate the two sides of the case.
- Locate the tape on the battery wires and the tape on the speaker wires. Remove both pieces of tape.

Step 6 — Battery

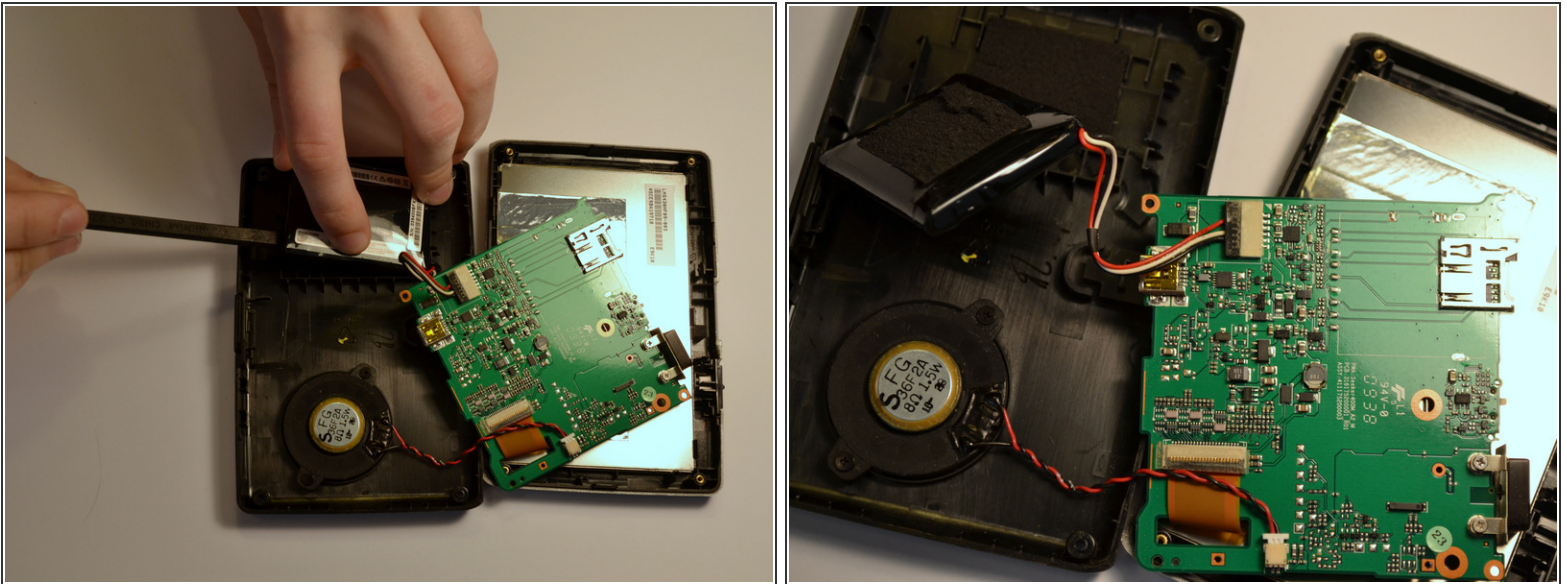



- Use the black spudger to break the seal between the adhesive and battery. Use the same spudger to continue to pry the battery from the backing
- ⓘ This may be a little tough to separate the battery and the adhesive

Step 7

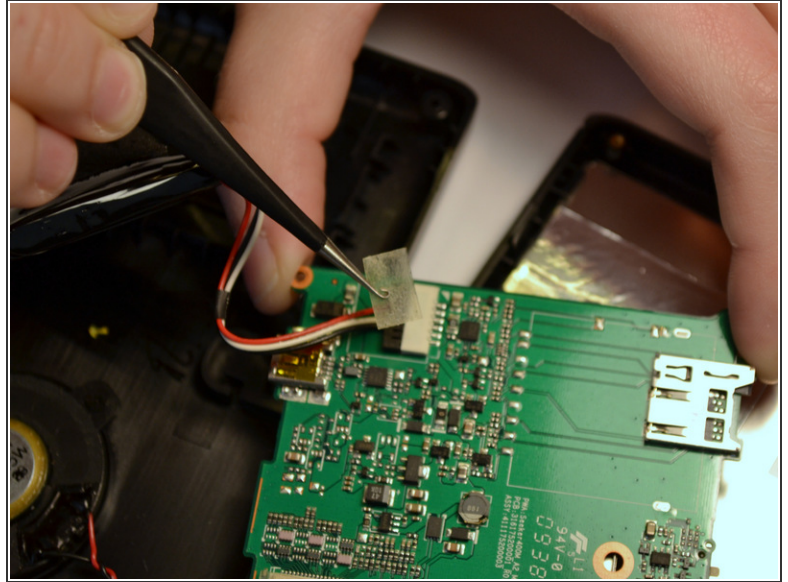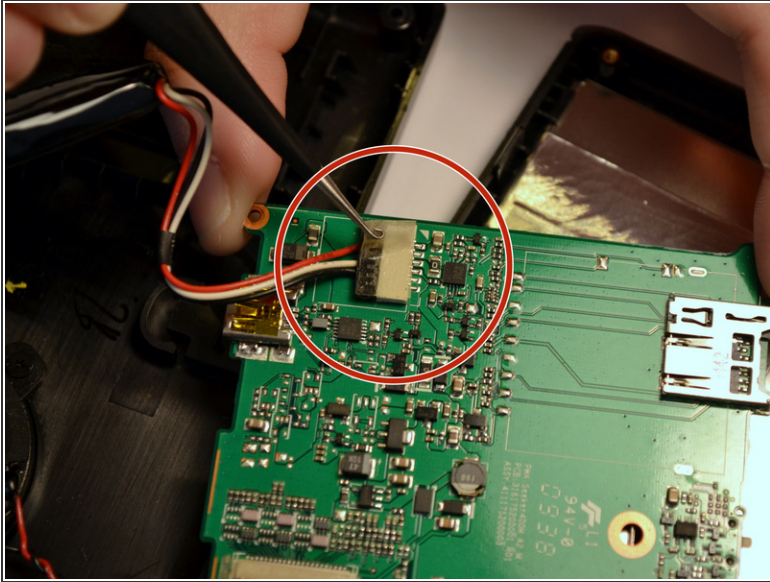

- Lift the battery from the device
- Once the battery is free from the adhesive, remove the piece of tape with a pair of tweezers that is covering the connection of the battery to the motherboard.

Step 8

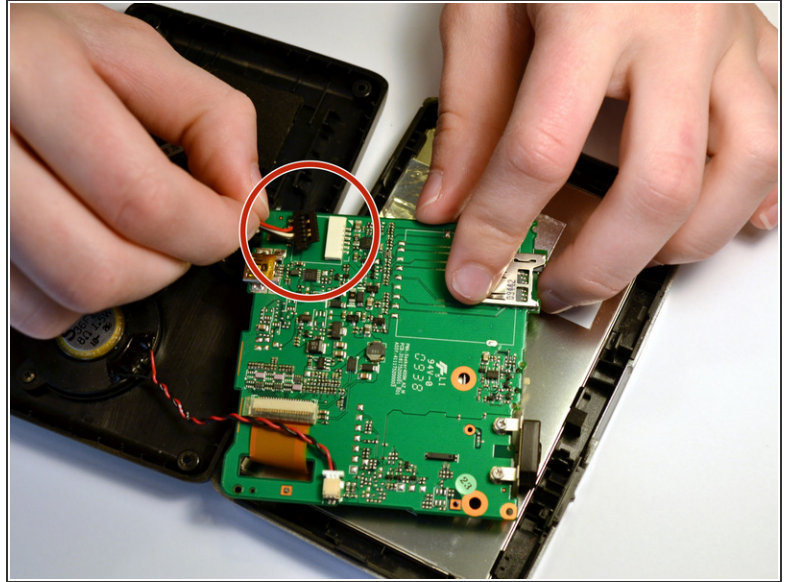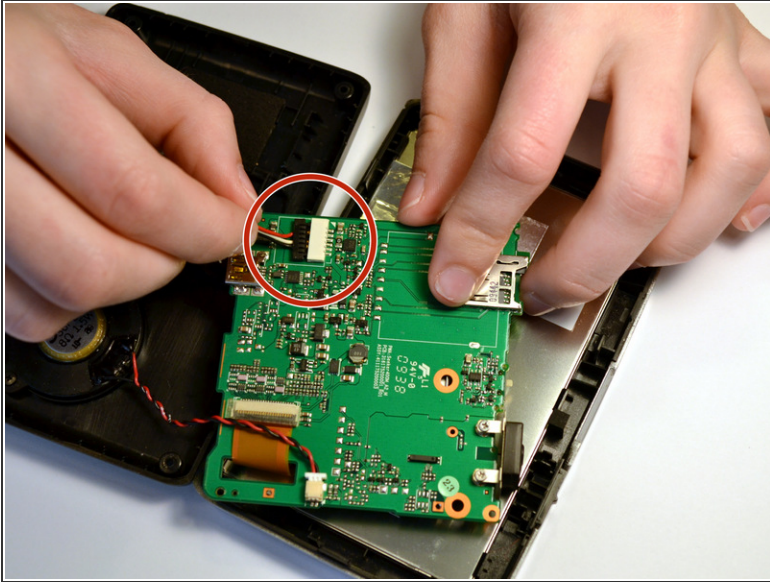

- Unplug the battery from the mother board by pulling back the clips and pulling the wires away from the motherboards receptacle

⚠ It is important for your and the device's safety to remove the battery before continuing with any other part removals.

i It is not necessary to separate the red and white wires from the battery. A replacement battery pack will come with similar wires already attached.

To reassemble your device, follow these instructions in reverse order.

This document was last generated on 2017-07-22 08:28:54 AM.